



**HOSHIZAKI**

## > **IM-45CA**

daily ice production capacity of up to 47kg



Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The I-Fit series of cube ice maker produces standard size ice (28x28x32mm) that is applicable in many settings and designed for uncomplicated usage from start to finish.



> **IM-45CA**

CUBE ICE MAKER SERIES


**I-FIT**  
SERIES

## FEATURES


- > flush-back design for easy installation
- > round front door for quick access to ice
- > one-piece door design and pull-out air filter for simple cleaning
- > front water valve access for easy serviceability
- > sharp stainless steel exterior



## UNIQUE ICE PRODUCTION SYSTEM

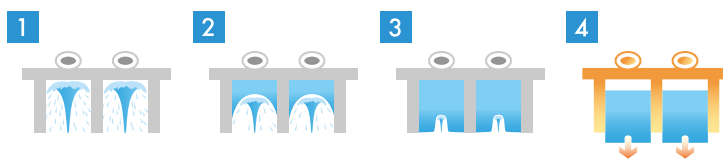


## ICE SIZE




# DIMENSIONS & SPECIFICATION


## CUBE ICE MAKER AIR SYSTEM

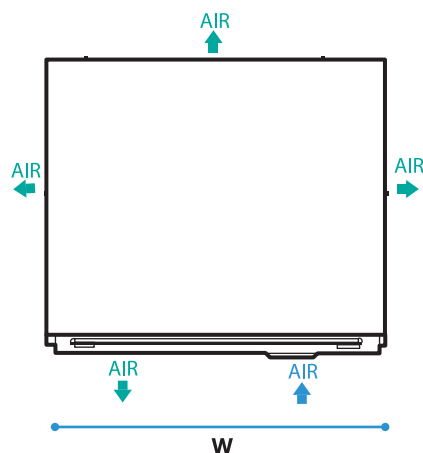

## FRONT SIDE

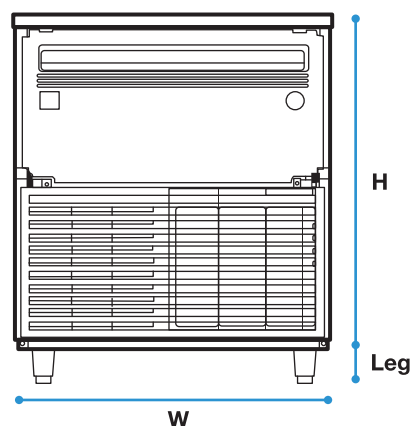

## BACK SIDE

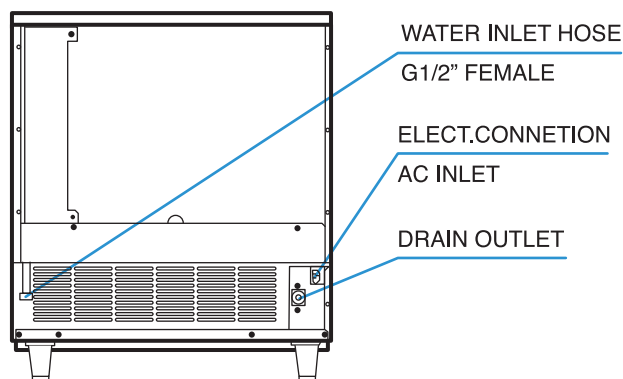

MODEL NAME		IM-45CA
ICE DIMENSIONS (MM)		28 x 28 x 32
DIMENSIONS (MM)		Body : 660 x 570 x 695 / Leg Height : 90-120 mm
PACKED DIMENSIONS (MM)		760 x 680 x 880
WEIGHT (NETT/GROSS)		52 KG / 65 KG
AMPERAGE / STARTING AMPERAGE		2.0A / 16A
ELECTRICAL CONSUMPTION		310 W
REFRIGERANT CHARGE		R134a
HEAT REJECTION (AT32°C/WT21°C)		670 W (576 kcal/h)
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	47 KG
	(AT21°C/WT15°C)	44 KG
	(AT32°C/WT21°C)	38 KG
WATER CONSUMPTION PER 24H (AT21°C/WT15°C)		0.12 m <sup>3</sup>
		2.7L / 1KG ICE
ICE PRODUCTION (AT21°C/WT15°C)	FREEZE CYCLE TIME	23 MIN
	PER CYCLE	0.67 KG / 30 PCS
STORAGE CAPACITY		15 KG

**NOTE:** All dimensions indicated are Width x Depth x Height in mm.

**OPERATING CONDITIONS:** • Voltage Range:  $\pm 6\%$  • Ambient Temperature: 1°-40°C  
• Water Supply: 5°-35°C / 0.07-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50 Hz

• **WARRANTY:** Two years parts & labour for entire unit, 3<sup>rd</sup> year on compressor only. Excluding door & exterior damages